



Flexible Power Transfer Solutions for Commercial & Industrial Applications

ASCO Power
Technologies™

ASCO 300 SERIES
Power Transfer Switches



ascopower.com


Schneider
Electric

ASCO 300 SERIES Automatic Transfer Switches

Power outages impact small and large facilities alike. ASCO 300 SERIES Automatic Transfer Switches offer rugged design and reliable performance. For small and mid-size commercial and industrial facilities, in packaged solutions that are easy to select, procure, install, and operate.

Every 300 SERIES generator transfer switch is engineered with ASCO's reliability expertise in a package that makes backup power accessible for small and mid-size facilities. Leveraging knowledge derived from a century of critical power transfer experience, each 300 SERIES transfer switch is backed by the same ASCO technical support and service that solves the most demanding critical power challenges facing facilities today.

Product Details

 [Transfer Switch
Overview](#)



300 SERIES Automatic Transfer Switches


Designed to fit anywhere

The ASCO 300 SERIES product line provides the most compact generator power transfer switches in the industry.

Available to mount on walls or floors, all models through 2000 amperes are completely front-accessible. This permits installation flush against walls while allowing installation of cabling and connections from the front of the switch. Cable entrance plates are standard on 1600 and 2000 amperes units; these allow use of optional side-mounted pull boxes for additional cable bending space.

- 30 through 3000 amperes in compact designs
- Up to 600 VAC, single or three phase
- Listed to UL 1008 – Standard for Safety – Transfer Switch Equipment
- True double-throw operation: The single solenoid design is inherently interlocked to prevent simultaneous connections of two power sources
- Will not transfer to a dead source – single solenoid operator derives power from the destination source
- Easy-to-navigate 128x64 graphical LCD display with keypad provides LED indicators for switch position, source availability, not-in-auto mode, and alert conditions
- Integrated, multilingual, user interface for configuration and monitoring
- Available Delayed Transition operation
- Optional Relay Expansion Module with extra relays for accessory outputs
- Soft keys for test function and time delay bypass
- Emergency source failure alert indication
- Optional Historical Event Log
- Displays ATS monitoring information
- Built-in diagnostic functions
- Password protection to prevent unauthorized actions
- Adjustable delay feature prevents nuisance transfer due to momentary utility power outages and generator dips
- ASCO's patented Predictive Outage Detection senses voltage instability conditions or flickers and proactively starts the generator for protection of equipment and reduction of downtime
- Models up to 600 Amps offer multi-voltage compatibility from 208V to 480V – one model for multiple applications.
- Auxiliary contacts signal position of main contacts – two for normal and two for emergency position
- Standard solid neutral terminals
- Restriction of Hazardous Substances (RoHS) compliant controller
- Standard 2 year warranty. Optional 1, 2, and 3 year extensions

Power Knowledge

 [Basic Automatic Transfer Switch Functions](#)



300 SERIES Automatic Switching Solutions


Automatic and Non-Automatic Transfer Switching

ASCO Transfer Switches are available in both automatic and non-automatic types. Both are electrically operated. For automatic transfer switches, the controller initiates transfer between power sources. For non-automatic transfer switches, a user initiates transfer using local or remote controls.

300 SERIES non-automatic transfer switches offer the following features:


- Models range from 30 through 3000 amperes, up to 600V
- Source acceptability lights inform operator when sources are available to accept load
- Controller prevents inadvertent operation under low voltage conditions
- Standard in-phase monitor for transferring motor loads between live sources


Power Knowledge


 [Non-Automatic and Manual Transfer Switches for Backup Power Applications](#)



Power Knowledge

 [Transition Modes for Automatic Transfer Switches Part 1 and Part 2](#)


 [Transferring Motor Loads between Power Sources](#)

 [Transferring Loads with Zero Power Interruption](#)

Open Transition Transfer Switching

ASCO Transfer Switches are available with a standard, 2-position, open transition models that reliably transfer loads in less than 50 milliseconds. Open transition switches are suitable for a wide range of applications.


- 30 to 3000 amps
- Single-operator switching mechanism prevents simultaneous connection of both sources
- Available In-Phase Monitor can be activated for transferring motor loads

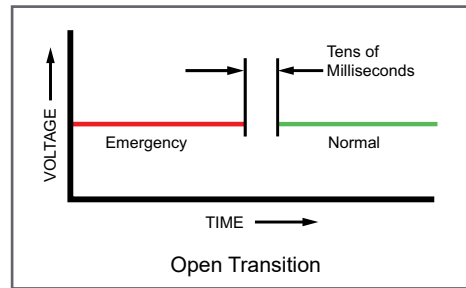

Delayed Transition Transfer Switching


ASCO Delayed Transition Transfer Switches transfer loads between power sources using a timed load disconnect position with an adjustable delay.

- 150 through 3000 amps
- Reliable, field-proven, dual-solenoid operating mechanism
- Mechanical interlocks to prevent simultaneous connection of both power sources
- Adjustable delay for load disconnect – 0 to 5 minutes
- Non-automatic models available in manual operation configuration
- Automatic models available with load shed feature

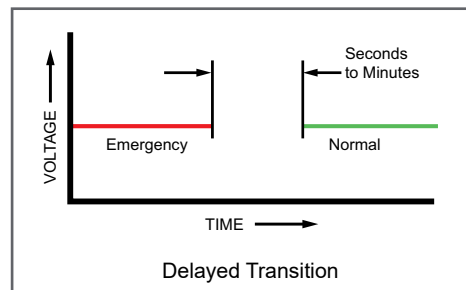

300 SERIES Group G Controller

The 300 SERIES Group G Controller is reliable and field-proven. It provides all of the voltage, frequency, control, timing, and diagnostic functions required for most emergency and standby power applications.

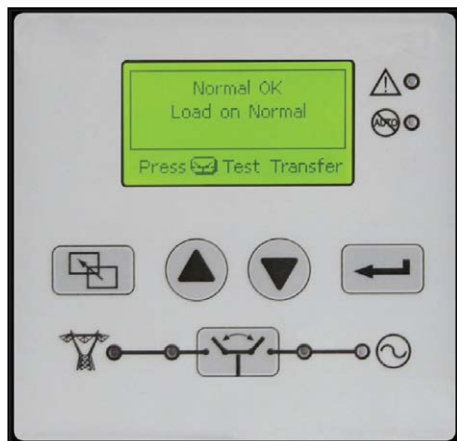

- Touch pad programming
- Displays active timers
- On-board diagnostics
- Password protection
- Voltage and frequency sensing
- Status and control functions
- Patented Predictive Outage Detection feature

Product Details

 [Group G Controller](#)

Transfer Switch Communications and Metering

Options to customize functionality and increase value

Remote Annunciation

Monitor power equipment status from anywhere

Monitoring and control transfer switches from across the room, building, or from Internet.

5310 – LED annunciator – Single ATS

5350 – LED annunciator – up to 8 ATSS




Product Details

 [5300 SERIES Annunciators](#)

Metering

Transfer switches are the perfect place to monitor power flow, power conditions, and power events

5210 Power Meter – Provides deeper insight into circuit status and conditions.

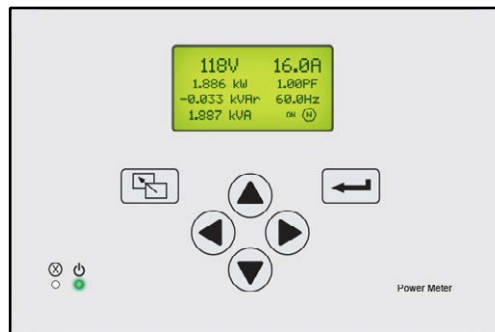

Product Details

 [5210 Power Meter](#)




Communication

Turn transfer switches into power information portals

5140 Connectivity Module – Makes status and power information from a single switch available to via ModBUS, SNMP, and web pages.



Product Details

 [5140 Connectivity Module](#)

300 SERIES Optional Accessories

Communications

11BE	Feature Bundle. Programmable engine exerciser with seven independent routines run the generator with or without loads, on a daily, weekly, bi-weekly, or monthly basis. Controlled from the user interface keypad. <ul style="list-style-type: none"> Event log display shows the event number, time and date, type and reason (if applicable). Stores up to 300 events RS485 Communication Port enabled common alarm output contact On three-phase systems, Accessory 11BE enables line-to-line voltage imbalance sensing and three-phase sensing capabilities for the Emergency power source as well as the Phase Rotation checking for both power sources.
18RX	Relay Expansion Module provides accessory relays and includes one Form C contact for normal source availability (18G), and one Form C contact for emergency source availability (18B) (contact rating 5 amperes @ 30 VDC or @ 125 VAC resistive) (100 ma, 4 VDC min). Additional output relay is provided the default is to indicate a common alarm.
72EE	Connectivity module provides remote monitoring and control capabilities and includes accessory 11BE feature bundle

Environment and Power

44A	Strip heater with thermostat for cold environment to prevent internal condensation and icing. External 120-volt AC power source required.
44G	Strip heater with thermostat, wired to load terminals on 208-240, 360-380, 460-480, 550-600 volt models. Contains wiring harnesses for all transfer switch sizes.
1UP	UPS back up power runs controller and LCD display for 30 seconds without AC power

Extension Harness

37B	Six-foot extension harness for open type units to accommodate customer mounting of controls and switch
37C	Nine-foot extension harness for open type units to accommodate customer mounting of controls and switch

Indicators

62W	Audible alarm with silencing feature to signal transfers to emergency. (For D-frame models, may require oversize enclosure depending on accessory combination).
-----	-----------------------------------------------------------------------------------------------------------------------------------------------------------------

Customer Control Circuits

30A	Load-shed circuit initiated by opening of a customer-supplied contact (Open Transition model only)
30B	Load-shed circuit initiated by removal of customer-supplied control voltage (Open Transition model only)
30AA	Load-shed circuit initiated by opening of a customer-supplied contact (Delayed Transition model only)
30BA	Load-shed circuit initiated by removal of customer-supplied control voltage (Delayed Transition model only)

Surge Protection

73	Surge suppressor rated 65 kA
----	------------------------------

Metering

23GA, 23GB	Load Current Metering card measures either single or three-phase load current. Not available with Power Meter option 135L. Use 23GA for Single-Phase, 23GB for Three-Phase.
135L	Power Meter on load side (includes shorting block and current transformers). Not available with Load Current Metering options 23GA or 23GB.


Field conversion kits


Kit No.	Description
935147	Advanced Function Bundle Retrofit Kit (11BE) – See above accessory 11BE description for details.
935148	REX Module with Source Availability Contacts (Acc. 18RX)
935149	UPS to allow controller to run for 30 seconds minimum without AC Power (Acc. 1UP)
935150	1/3 Phase load current sensing card only (Acc. 23GA/GB)
K613127-001	Strip Heater (125 watt) 120 volt (Acc. 44A)
K613127-002	Strip Heater (125 watt) 208-480 volt (Acc. 44G)
948551	Quad-Ethernet Module (Acc. 72EE)
K609027	Cable Pull Box (1600-2000 amperes)

Withstand and Close-on Ratings

Withstand and close-on ratings for ASCO open OEM transfer switches vary by model and are among the highest in the industry. For the latest ratings, always consult **ASCO Technologies' *Engineering Application Information – Withstand and Closing Ratings for Transfer Switch Equipment*** (Publication Number 1128) or contact an ASCO representative directly.


Power Knowledge

 [UL 1008 Transfer Switch Withstand and Closing Ratings](#)

 [Performance Testing for Transfer Switches](#)

Additional 300 SERIES product information

Transfer Switches and Panels	Controls	Technical Information
Manual Transfer Switch	Group G Controller	Withstand and Closing Ratings
Manual Transfer Switch with Quick Connects		Weights and Dimensions and Ordering Info
Quick Connect Power Panel		Drawings
Dual Purpose Quick Connect Power Panel		Wiring Diagrams

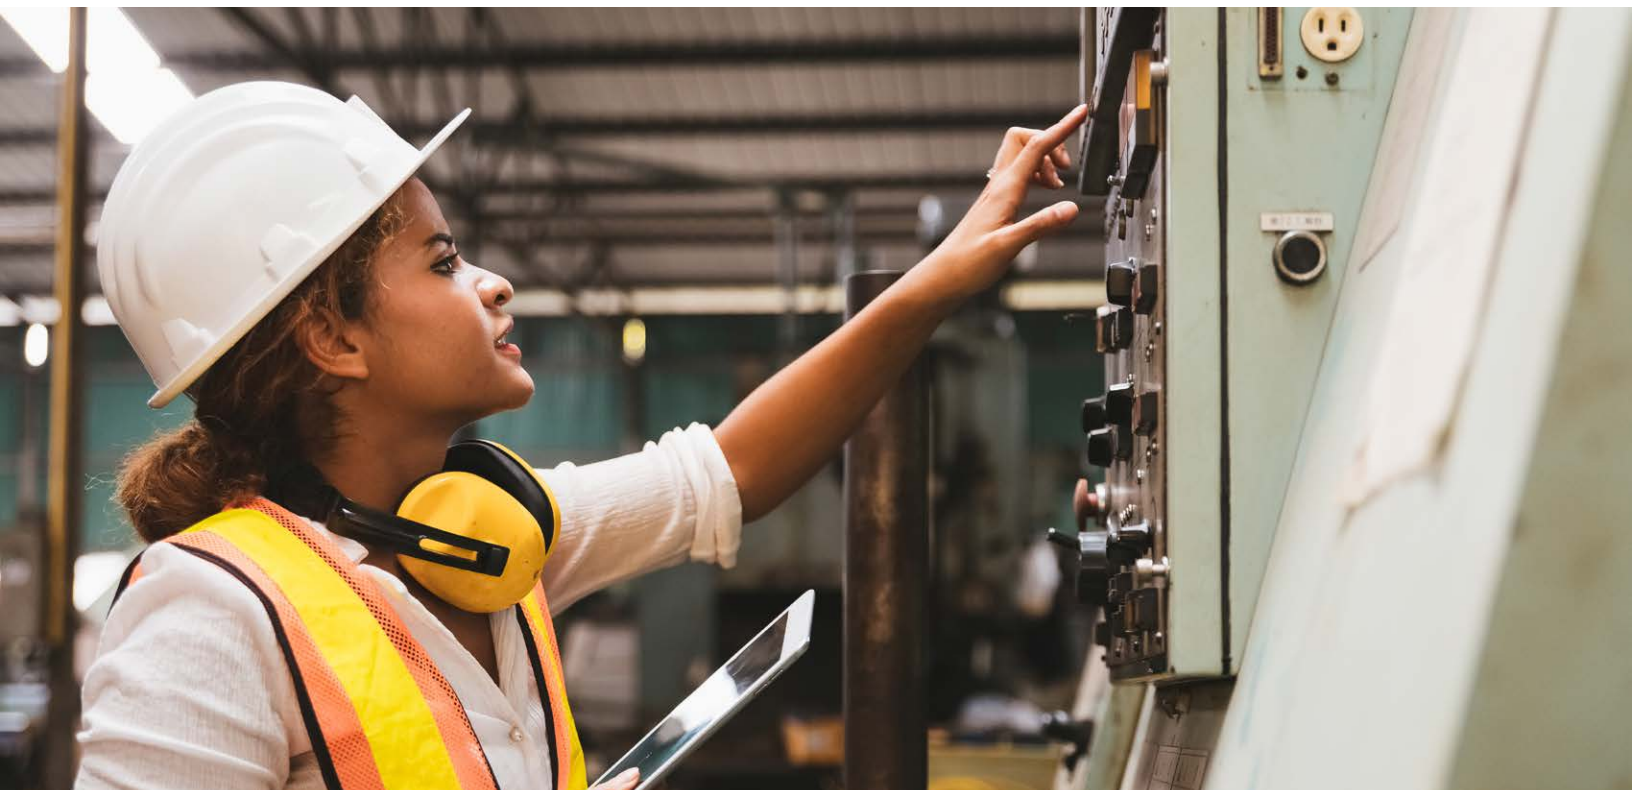

300 SERIES Manual Transfer Switching and Quick Connection Solutions


ASCO 300 SERIES Manual Transfer Switching and Quick Connection Solutions offer reliable service and application flexibility for a wide range of facilities.

Manual Transfer Switches




- Three-position, easy-to-use center-off switch
- Compact design – easy to install and maintain
- Designed to handle demands of motors and inrush currents

Power Knowledge

 [Differences Between Manual, Non-Automatic, & Automatic Transfer Switches](#)

Product Details


 [300 SERIES Manual Transfer Switch](#)

Manual Transfer Switches with Quick Connects



- The ASCO 300 SERIES Manual Transfer Switch with Integrated Quick Connects provides a total temporary power connection and transfer solution
- Enables connection and control of a temporary or portable generator
- Provides a complete UL 1008-listed solution in a single unit

Product Details


 [300 SERIES Manual Transfer Switch with Quick Connects](#)

Quick Connect Panels




- Listed to UL 1008 Transfer Switch Accessory standard
- Utilizes standard Cam-Lok™ receptacles for quick connections
- Standard Type 3R construction is weatherproof with or without cable receptacles
- Utilizes standard Series 16 Single Pole quick connect receptacles

Power Knowledge

 [NEC Requirement for Permanent Manual Switching Means](#)

Product Details


 [300 SERIES Quick Connect Power Panel](#)


Dual-Purpose Manual Transfer Switches with Quick Connects



- Provides both supplemental backup power and load testing connectivity through a single device.
- Listed to UL 891
- Utilizes standard Series 16 Single Pole quick connect receptacles

Product Details

 [300 SERIES Dual Purpose Quick Connect Power Panel](#)



ASCO Power Technologies – Global Headquarters
160 Park Avenue
Florham Park, NJ 07932
Tel: 800 800 ASCO

www.se.com/us/en/brands/ascopower/
customercare@ascopower.com